



(CP-4) Free Exit System

AUTOMATIC GATE OPENER

Built for professional free-exit gate installations.

CP-4 offers professional installers a dedicated, hard-wired solution for automatic gate free exit. With self-contained sensing and adjustable sensitivity, it delivers reliable hands-free gate activation you can trust.



Superior Sensing

Magnetometer vehicle detection that triggers only on moving steel. Not motion, heat, or pressure.

- ✓ No False Alarms
- ✓ Adjustable Sensitivity
- ✓ Magnetometer Technology



Dedicated Free Exit Control

A hard-wired, hands-free solution designed specifically for free exit automation.

- ✓ Purpose-Built for Free Exit
- ✓ Instant Reliable Activation
- ✓ 3-Year Warranty



Universal Gate Compatibility

Integrates with all major gate operators.

- ✓ AC & DC Compatible
- ✓ N.O. or N.C. Relay Options
- ✓ Power or Solar Gates

CP-4 delivers dependable, hard-wired free-exit control for automatic gate operators.

Versatile

- Sensitivity Adjustment
- Universal Voltage AC and DC
- Works with power or solar gate operators

Durable Design

- IP Rating: 68
- Weather Resistant Cable
- Proven Digital Circuit
- Heat Resistance

Easy To Use

- Self-Contained System
- Conduit-Ready Housing
- Lowest Standby Current In The Industry
- Industry Standard Wire Colors


Self-Contained Sensor "Puck"



100 ft. Cable (200, 300, and 500 ft. Available)



DUAL EXIT TERMINAL	SINGLE EXIT TERMINAL
RED --- POWER +	RED --- POWER +
BLACK --- POWER -	BLACK --- GND or COM
WHITE --- COMMON	WHITE --- FREE EXIT or OPEN TERMINAL
BLUE --- EXIT N.O.	BLUE --- FREE EXIT or OPEN TERMINAL
YELLOW --- EXIT N.C.	

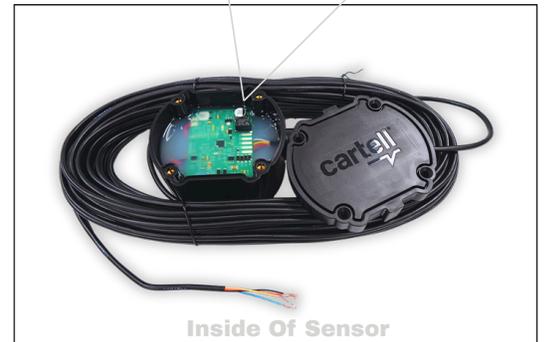

Inside Of Sensor

TECH SPECS

Power Required:	8-24 VAC; 8-30 VDC
Stand-By Current:	30-70 Microamps (µA) max.
Alarm Current:	40-50 Milliamps (mA) max.
Relay Contacts:	SPDT, Floating, N.O. or N.C. (Form C)
Relay Contact Rating:	1 amp/24 VDC (1 mA at 5 VDC min. load)
Relay Time:	2-3 Seconds
Temperature Range:	-25°F - 140°F (-32°C - 60°C)
Dimensions	4.5" Diameter x 2.5" Height (11.43 cm x 6.35 cm) Slip Joint: 0.5 in L x 0.875 in D (1.27 cm L x 0.875 cm in D)
Weight:	5 lbs (2.27 kg) with 100 ft. cable



WARNING: This product can expose you to chemicals including Acrylonitrile, which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.



CARTELL.COM

(717) - 532 - 0033 • INFO@CARTELL.COM
510 W KING ST, SHIPPENSBURG, PA 17257

TECH SUPPORT/RMA'S
SALES
SHIPPING
ACCOUNTING
ORDERING (DISTRIBUTORS)

(717) - 532 - 0033, OPTION 1
(717) - 532 - 0033, OPTION 2
(717) - 532 - 0033, OPTION 3
(717) - 532 - 0033, OPTION 4
SEND PO TO: ORDERS@CARTELL.COM